



MD 42

Quick Guide
Kurzanleitung
Guide rapide
Guida rapida
Guía de inicio rápido
Guia rápido
Beknopte handleiding
Krótka instrukcja obsługi
Snabbguide

Kort vejledning
Pikaohje
Γρήγορος οδηγός
Kısa kılavuz
Краткая инструкция
快速指南
快速使用指南
クイックガイド
퀵 가이드

SENNHEISER



www.sennheiser.com/download

Sennheiser electronic SE & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

Printed in Germany, Publ. 07/24, 402205/A01


In the box





MD 42




Setup

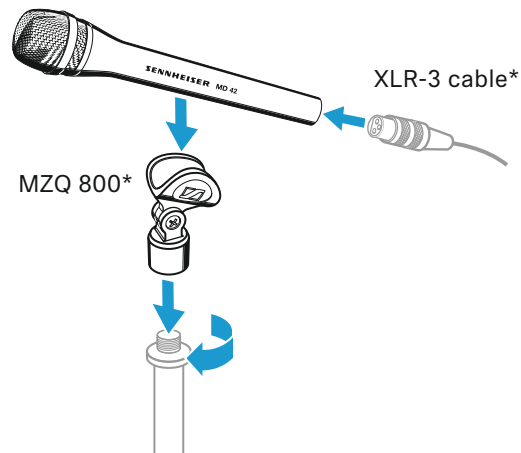

*optional accessories

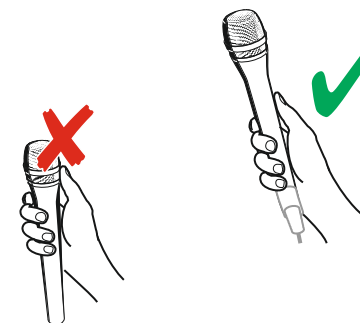


Accessory

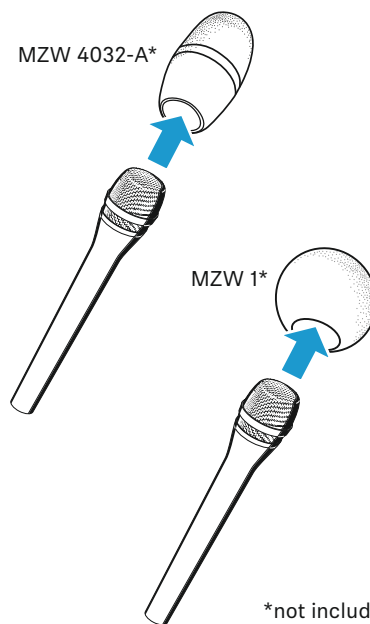


*not included




MD 42 MZW 4032-A or MZW 1

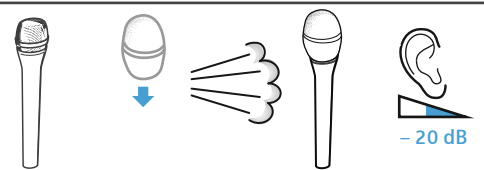


Cleaning

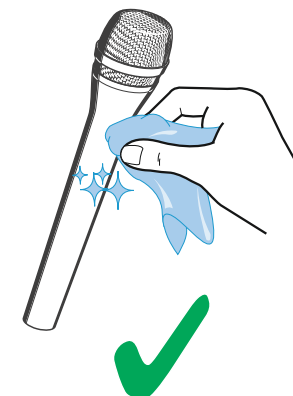



Cleaning

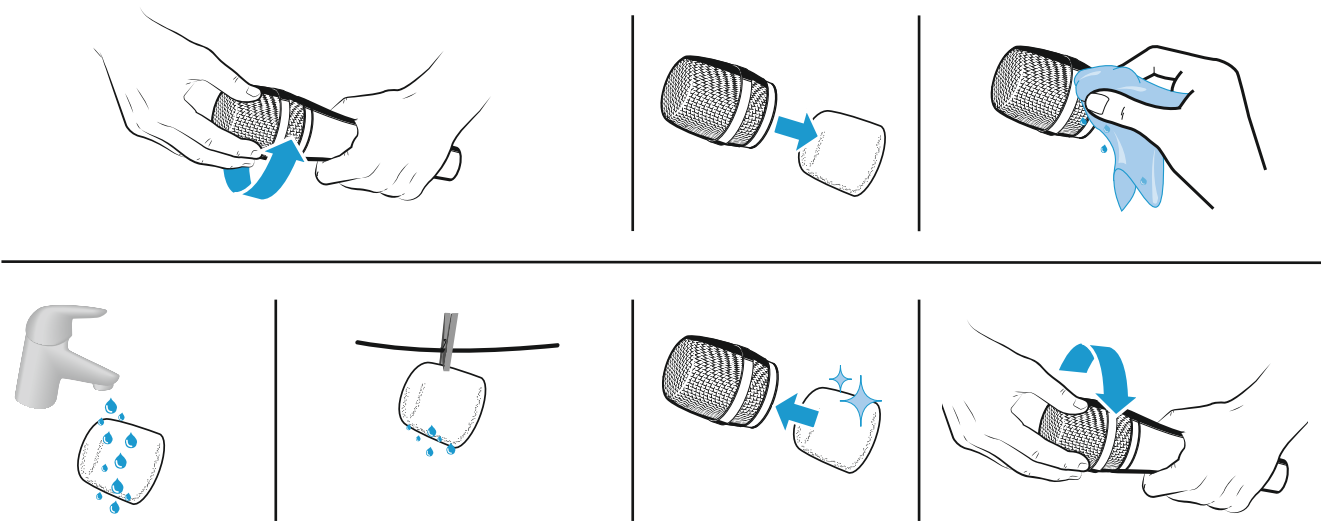

Connector assignment

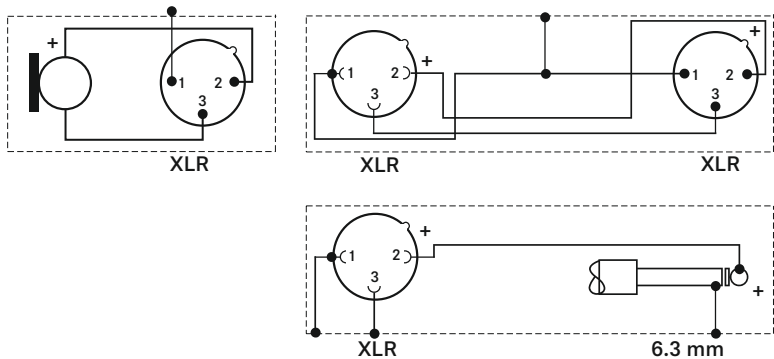

Polar pattern and frequency response

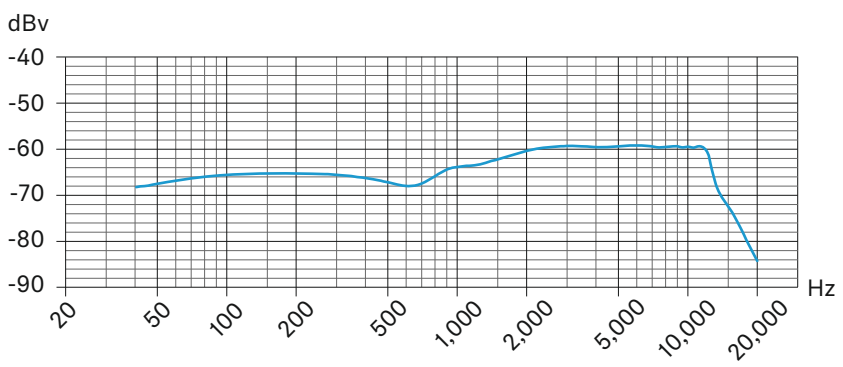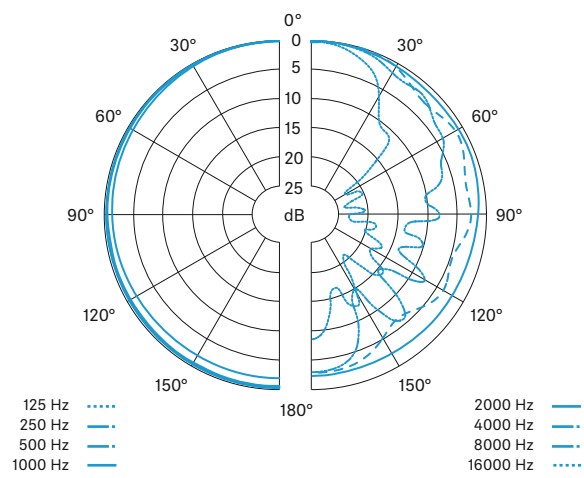

Specifications

Frequency response	40 - 18,000 Hz
Pick-up pattern	omni-directional
Free-field open-circuit sensitivity at 1 kHz	2.0 mV/Pa ± 2.5 dB
Nominal impedance at 1 kHz	350 Ω
Min. terminating impedance	1 kΩ
Connector	XLR-3
Dimensions	ø 49, 250 mm
Weight	360 g